Rotowrap®

Rotowrap S140A ADVANCED

Semi-Auto Wrapping Machine **with Rotating Table**

'ROTOWRAP' Stretch Wrappers are manufactured in Italy to **stringent European standards**. There are currently many units operating in Companies throughout the world. Australian Customers have testified to savings achieved and an **increase in labour intensity and boost in staff morale** after installing a 'ROTOWRAP' Stretch Wrapper.

Ideal for both small companies and for companies with high production rates and/or heavy usage.

Electromagnetic Brake System

Affordable

Easy Operation

Reliable

Rotowrap S140A ADVANCED

Semi-Auto Wrapping Machine **with Rotating Table**

Main Features

- **Rotating table** Ø 1500 mm - load 1200 kg
- Distance between the column and rotating table is **500mm**
- Wrapping height up to **2100mm with photocell** for automatic height detection
- **Programmable** top and bottom reinforcement turns
- Rotating table movement regulated by **variable frequency drive** from 5 - 12 rpm
- **Inverter for soft start and stop**, indexed turntable stops in home position
- **Variable speed of film carriage** completely customizable
- **Separate setting** of top and bottom wraps
- Film carriage **fall protection system**
- **Electronic control panel** with 4 programmable wrapping cycles - Single, double, double with topsheet, manual
- Built-In Fork **Relocation Sleeves**

Technical Data

- The standard machine is designed to wrap palletized loads with stretch plastic film having the **dimension up to 1200 mm (L) X 1200 mm (W)**, with a load capacity of 1200 kg

- The turnable is also available with a diameter of **1650mm or 1800mm** with a load capacity of 2000 kg

- The mast can be supplied to wrap pallets with **heights of 2100 mm or 2600mm**

- Table rotation speed and film carrier speed are **regulated by inverter** (turntable can rotate at a speed from 5 to 12 RPM)

Available Options

- 1650mm turntable - 2000KG capacity
- 1800mm turntable - 2000KG capacity
- Higher wrapping height - 2600mm
- Black Photocell eye to detect black or dark products
- Ramps for pallet trolley access

Power

- **Electricity:** 230 V single phase
- **Frequency:** 50 Hz
- **Installed power:** 0.7 kW

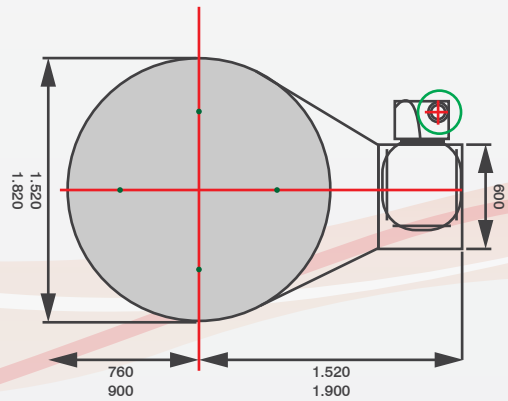

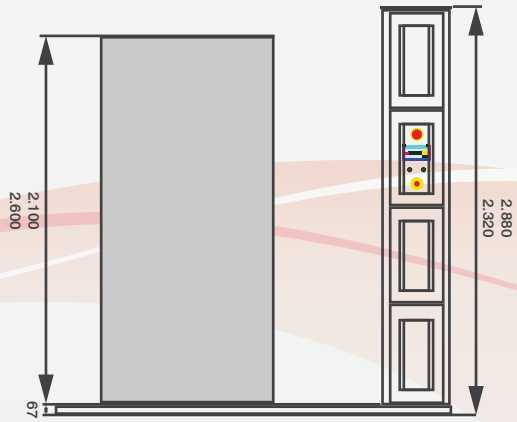

Contact Us